



Assembly Instructions for ClicSeal Mixing Lid

Attaching Mixing Lid To Can

1. Insert the paddle inside the paint can
2. Firmly, push down on the top of the mixing lid (Figure 1)
3. You should hear four "click" sounds
4. Look down, onto the top of the lid body to validate all four teeth have engaged the outside rim of the can chime.

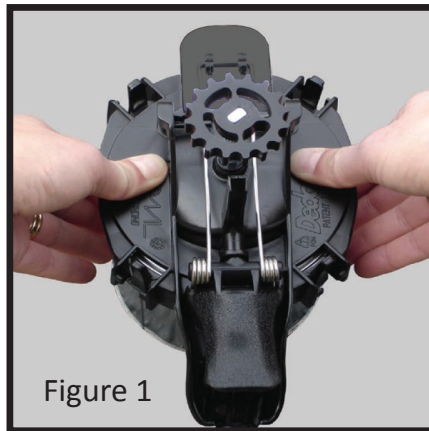


Figure 1

Removing Mixing Lid From Can

1. With your thumbs, push the rear tabs toward the back of the can while lifting the mixing lid slightly. (Figure 2)
2. Once the rear teeth are disengaged from the can chime, push the front two tabs toward the front of the can while lifting the mix lid slightly (Figure 3).
3. With all four teeth disengaged from the can chime, remove the mixing lid from the can.

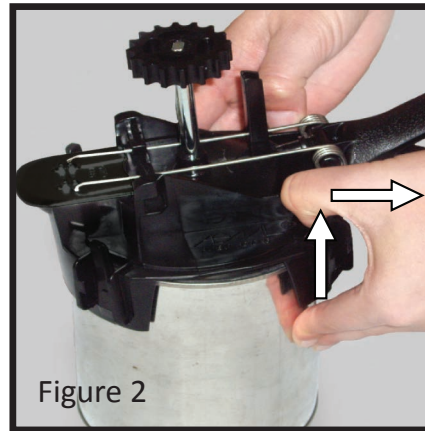


Figure 2

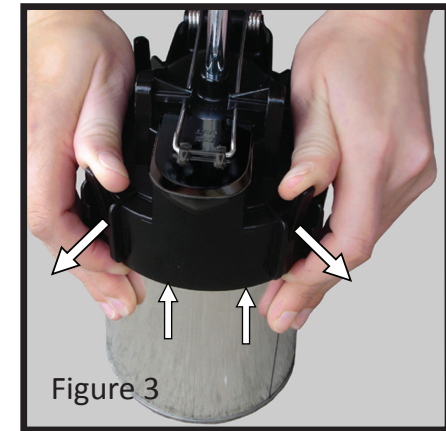


Figure 3

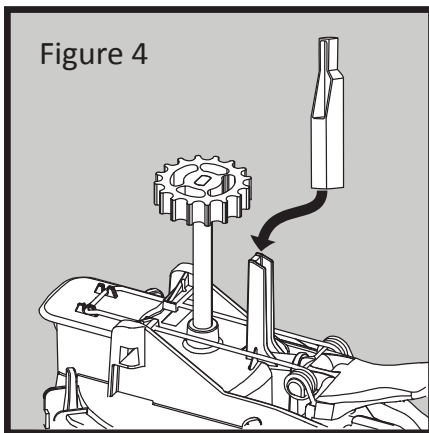


Figure 4

Half Liter Tower Instructions

When utilizing the lid for half liter cans simply place the provided tower extension over the current tower as shown in Figure 4. The tower extension prevents half liter cans from moving on the shelf during the mixing operation. It is not needed for lids used on cans other than the half liter.